


# DUAL CONVERSION COMMUNICATION CONVERTER - UP-CONVERTER

MODEL : UPC xx

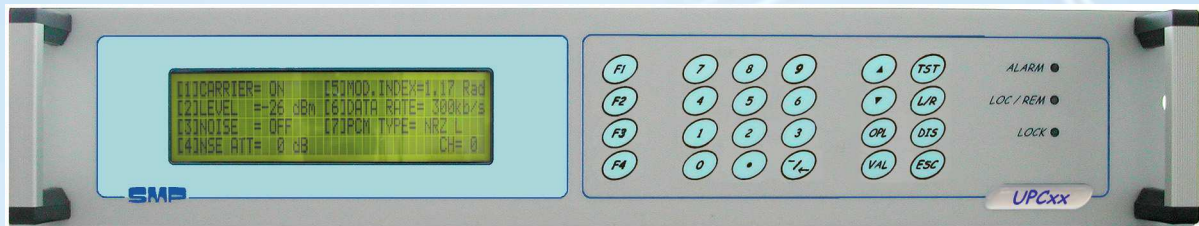

SMP UPC series of Dual Conversion Converters operate in all of the standard communication bands. The internal microwave local oscillator is generated from synthesized oscillator (standard step 1 kHz).

## MAIN FEATURES

- Dual conversion
- Low intermodulation distortion
- No spectral inversion
- Low phase noise : IESS -20 dB
- RS-232 or RS-485 or Ethernet M & C
- CE compliance